RCS Day 6

Pre-cover QC, opening layout, drywall cutting, fastening, and dust control


INSPECT BEFORE YOU COVER.

Hidden work gets verified and photographed before the panel goes on.

Today the goal is not to hide the wall. The goal is a finish-ready surface over verified work.

Today's flow

Quiz -> model -> guided practice -> capstone lab -> QC

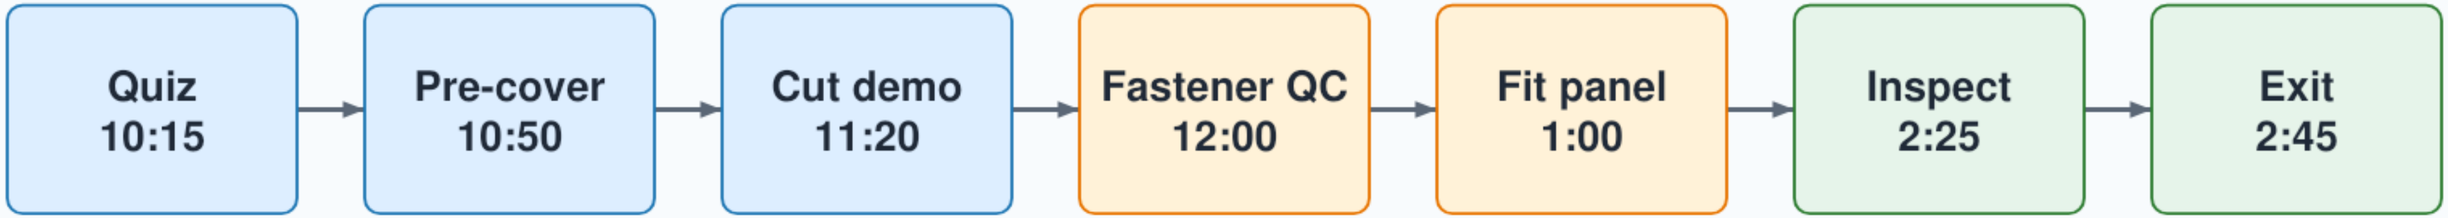

Morning: inspect rough-in, transfer openings, and plan dust control.
Afternoon: cut, dry-fit, fasten, and correct one 4 ft x 3 ft panel.
End: finish-readiness evidence and controlled cleanup.

Today's targets

What successful work must demonstrate

Pre-cover inspection

Panel + reference edges

Window + box openings

Fasteners + supports

Dust control + evidence

Complete a pre-cover inspection of framing and rough-in
Measure and cut a 4-foot by 3-foot drywall panel
Fit the panel around the window and device boxes
Fasten and prepare the surface for finishing

The day's path


Trace the work before building it



Transfer dimensions carefully and dry-fit before fastening. Protect hidden systems from blades and screws.

Controlled sequence

Release each stage only after its check

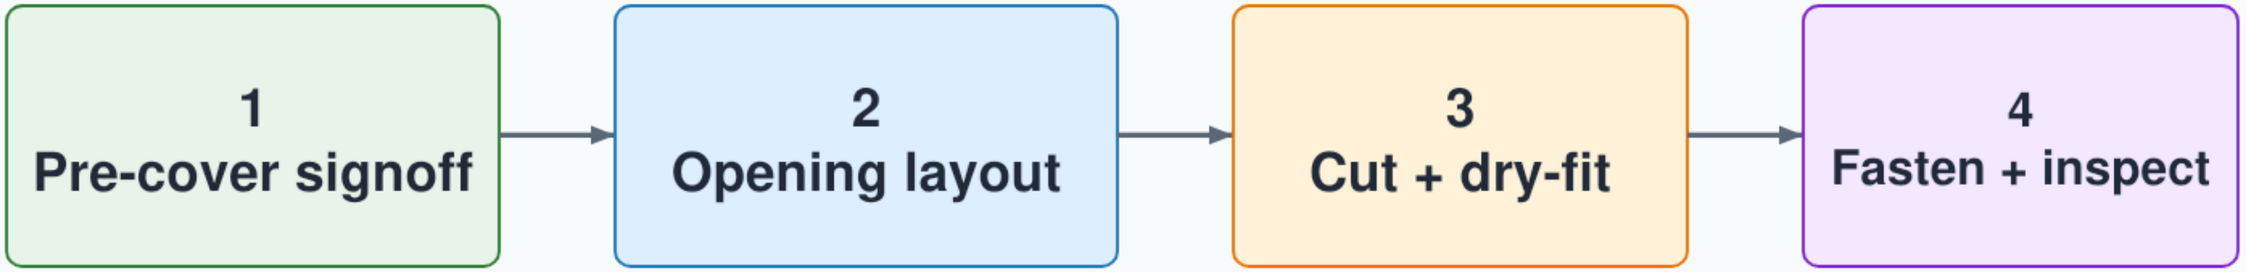

Work from a supported position. Correct a bad fit before driving fasteners around the opening.

Working roles

6 students; every result receives another set of eyes

Installer
measures + fits

Inspector
checks openings + fasteners

Documenter
records signoffs + photos

Use partner handling when needed.
The Inspector verifies the opening map before cutting.
No panel covers unsigned rough-in.

Verification checkpoints

Do not trust appearance alone

Pre-cover signed

Opening locations

Fastener dimples

Edges + cleanup

A correct fastener dimples the face without tearing it.
High and overdriven fasteners require correction before finish readiness.

Safety boundaries

The lab begins only inside these controls

Eye protection

Dust controls + SDS

Panel handling

Blade control

Use product- and task-appropriate ventilation, housekeeping, and PPE. Retract blades when not in use. Keep cut paths clear of hidden systems.

Professional judgment

Safe work pauses when the evidence conflicts

Good fastener
slight dimple; paper intact

Rejected fastener
high or paper torn

Fastener quality is visible evidence. Dry-fit openings and edges before committing the panel to the wall.

Quality criteria

Good physical work leaves visible proof

Sign the pre-cover checklist.
Measure openings from two reference edges.
Score, snap, back-cut, and support the panel.
Fasten without tearing face paper.
Inspect, correct, control dust, and reset.

Unsigned rough-in? Do not cover it.


Lab release checklist

The station earns work only after the checks

Framing and rough-in pre-cover check passed.
Panel and openings measured twice.
Cutout marks partner-verified.
Cut path protects boxes and hidden systems.
Dust controls and PPE are active.
Panel handling plan is clear.

Afternoon lab


Slow sequence. Clear callouts. No surprises.

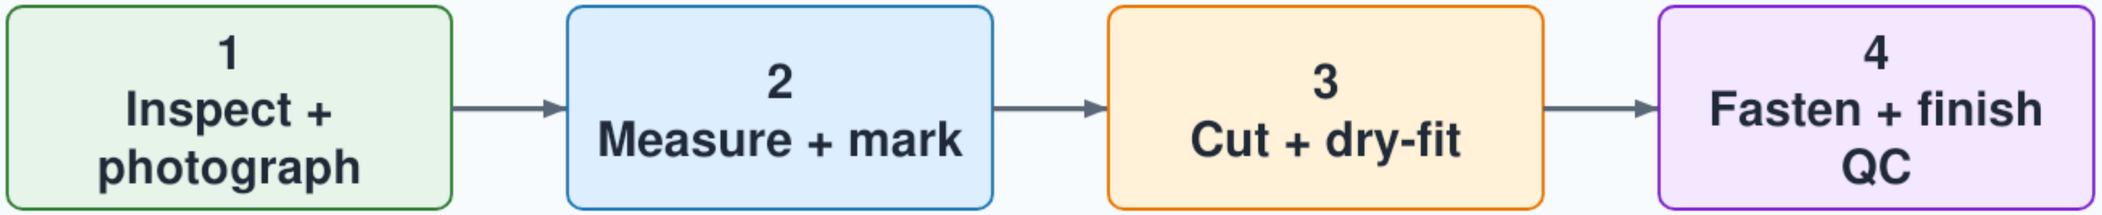

Fit and fasten drywall over the individual capstone wall while preserving the window and device-box openings.

Closeout order

End verified, documented, and reset

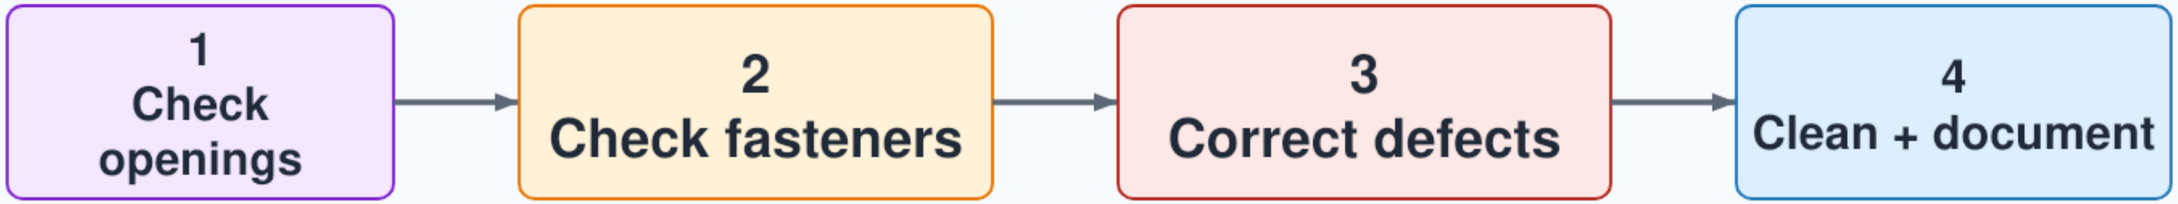

Leave the surface finish-ready: secure board, supported edges, clean openings, correct fasteners, and recorded corrections.

Evidence log

What students write down

Pre-cover	signed + photo	Initials: _____
Panel	4 ft x 3 ft	Measure: _____
Window	location + fit	Gap: _____
Boxes	clear + undamaged	Pass: _____
Fasteners	dimple + spacing	Pass: _____
Cleanup	dust controlled	Complete: _____

No pre-cover signoff, no panel. No finish-readiness inspection, no approval.

Exit ticket

Three checks before dismissal

1. Name one pre-cover item that must be verified.

2. Describe a correct drywall fastener dimple.

3. State the dust-control and blade-control plan.

Panel secure. Openings clear. Dust controlled. Evidence saved.