# RCS Day 2

Framing layout, wall members, supervised cutting, and square checks


## MEASURE. MARK. VERIFY. CUT.

**6 capstone walls. One approved drawing. Every cut gets a second check.**

**Today the goal is not to build fast. The goal is a square, traceable frame.**

# Today's flow

Quiz -> model -> guided practice -> capstone lab -> QC

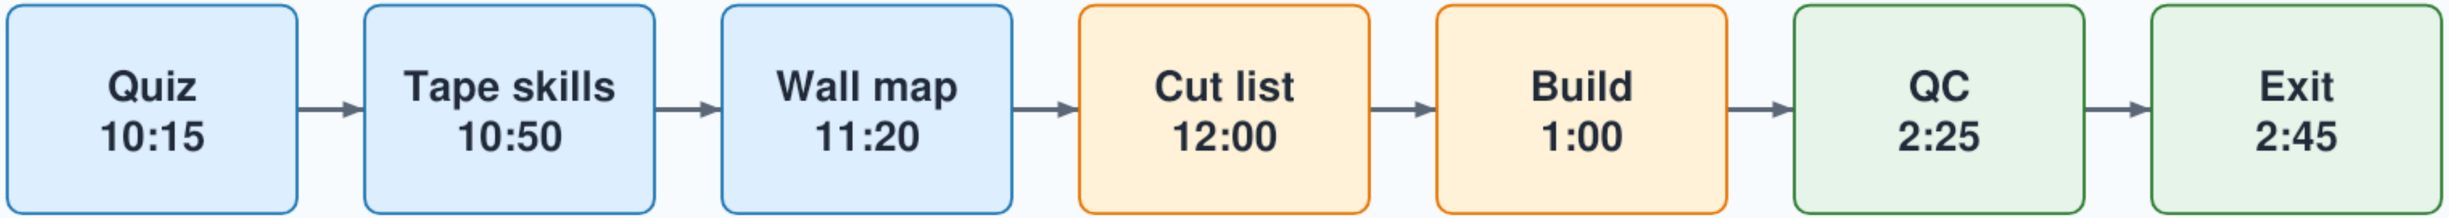


Morning: read to 1/16 inch and map every wall member.
Afternoon: build one individual window-wall frame under tool control.
End: dimensions, diagonals, fasteners, labels, photo, reset.

# Today's targets

What successful work must demonstrate

**Tape 1/16 inch**

**Plates + studs**

**King + jack studs**

**Header + sill**

**Square + evidence**

Read a tape measure to 1/16 inch and add common fractions
Identify plates, studs, king studs, jack studs, header, sill, and cripples
Lay out a 4-foot by 3-foot training wall with a framed window opening
Complete an instructor-approved cut list and assemble a square wall frame

# The day's path


Trace the work before building it




**A second set of eyes checks the mark before the saw starts. Conflicting measurements stop the work.**

# Controlled sequence

Release each stage only after its check

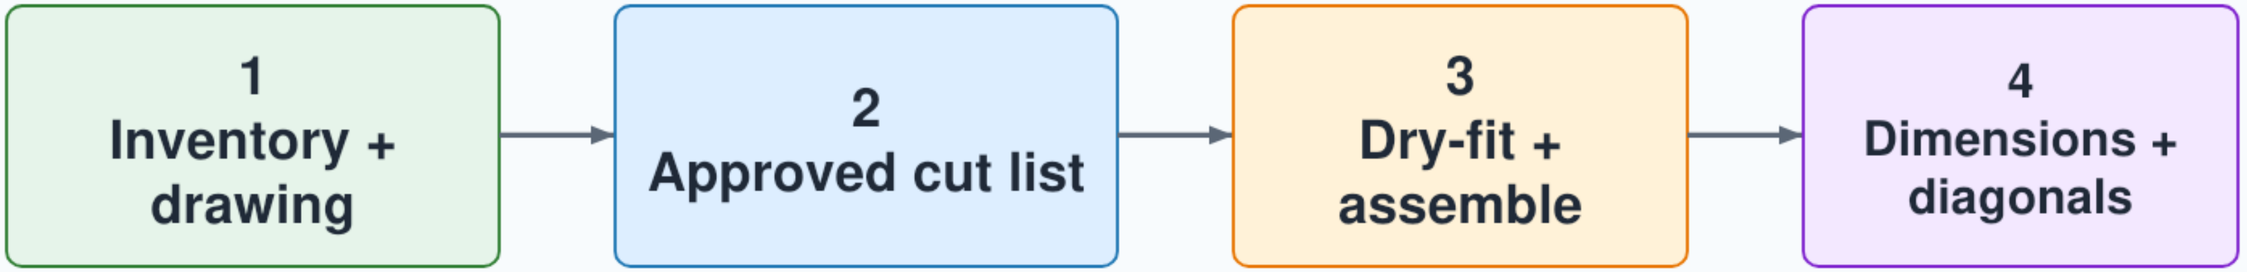


Keep the frame flat through assembly. Correct layout or square before moving to the next system.

# Working roles

6 students; every result receives another set of eyes

**Builder**
**measures + assembles**

**Inspector**
**checks marks + square**

**Documenter**
**records + photographs**

Rotate roles at the instructor checkpoint.
The Builder does not approve their own critical mark.
Say measurements out loud and record the final result.

# Verification checkpoints

Do not trust appearance alone

**Tape reading**

**Member labels**

**Diagonal A / B**

**Fasteners + edges**

Call the measurement, reference edge, and mark before cutting.
Match diagonals and verify overall dimensions.
Inspect fastener placement and lumber condition before approval.

# Safety boundaries

The lab begins only inside these controls

**Eyes + hearing**

**Guards remain on**

**Clamp / support stock**

**Cut approval**

Inspect lumber and tools before use. Keep body position out of the cut path. Stop for damaged stock, conflicting marks, or a missing guard.

# Professional judgment

Safe work pauses when the evidence conflicts

**Good path**
**measure -> mark -> verify -> cut**

**Stop-work path**
**conflict -> pause -> resolve**

**Speed never outranks control. A wrong cut wastes material; an unsafe cut can injure a person. Ask before guessing.**

# Quality criteria

Good physical work leaves visible proof

Read the plan before touching stock.
Use one reference edge and a clear carpenter's mark.
Dry-fit members in position.
Check overall dimensions and both diagonals.
Label, photograph, and reset the station.

**Unverified mark? Do not cut it.**


# Lab release checklist

The station earns work only after the checks

PPE and station inspected.
Training drawing identified.
Cut list complete and labeled.
Critical marks partner-verified.
Instructor authorizes each cut.
Frame remains supported and controlled.

# Afternoon lab


Slow sequence. Clear callouts. No surprises.

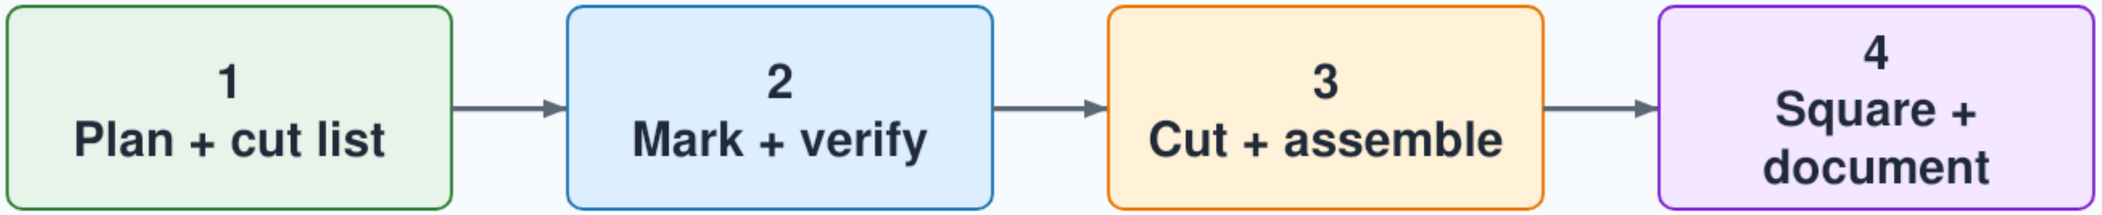


**Build the individual 4 ft x 3 ft capstone wall with framed window opening. Supervised cuts only after clearance.**

# Closeout order

End verified, documented, and reset

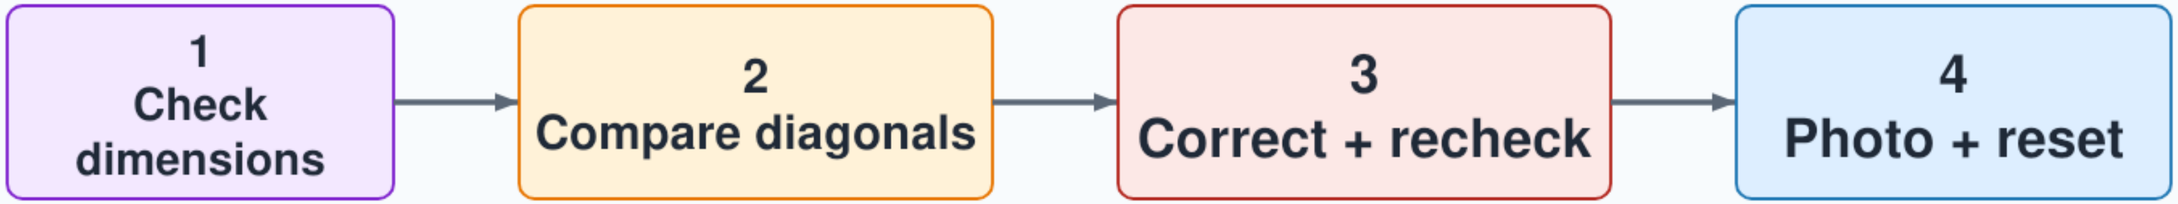


A finished-looking frame is not enough. Record the numbers that prove the wall meets the approved training drawing.

# Evidence log

What students write down

| | | |
|---|---|---|
| **Drawing** | approved version | Initials: _____ |
| **Cut list** | qty + length | Approved: _____ |
| **Diagonal A** | corner to corner | Value: _____ |
| **Diagonal B** | corner to corner | Value: _____ |
| **Window** | dims + square | Result: _____ |
| **Evidence** | overall + detail | File: _____ |

**No verified dimensions, no approval. Measure it while the wall is still open.**

# Exit ticket

Three checks before dismissal

1. Read one instructor-selected tape measurement.

2. Name the king, jack, header, sill, and plates.

3. Explain what the two diagonal measurements prove.

**Tools counted. Frame flat. Evidence saved. Station reset.**